# **Designer Collection Tubs**



# Mirage

### MODEL 43


59.5" x 30.5" / 42" x 19.75"

DROP-IN (cannot be undermounted) Not recommended as a tub/shower combination 85 gal to overflow

#### Acrylic CXL™


100 lbs / 45 kg soaker 150 lbs / 68 plumbed

Filling this tub to the maximum may require an above average size or dedicated water heater.

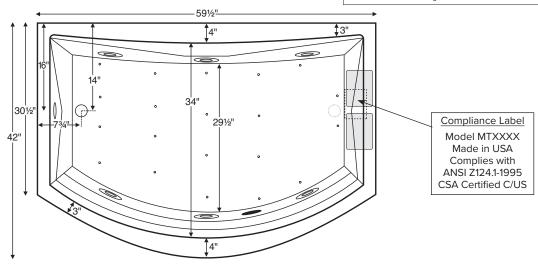

Available with left- or right-hand drain.

When ordered with Install Ease frame & skirt package, wall-mount valves are required. Shown with Air Massage and Standard Whirlpool Package.



### IMPORTANT:

Air baths and tubs with a pre-leveled foam base or frame system add 2-3" to overall tub height.

### **IMPORTANT ORDERING & INSTALLATION INFORMATION**

- Before ordering or installing, please consider future access to equipment.
- · Add proper bedding compound to fully level and support bottom of tub.
- When equipped with an air bath package, pre-leveled foam base or frame system, overall tub height is increased by approx. 2-3" and is designed to install on a flat, level subfloor.
- Radiance placed on airbath floor will affect placement of air jets.
- System components may extend beyond the perimeter of deck.

- Measure tub on-site before building tub decking.
- Advise MTI when planning to use a glass enclosure. Relocation of controls may be necessary.
- · Suction and control locations may vary.
- All tubs are compliant with ASTM C 1028-07 coefficient of friction. DoloMatte meets ANSI A137.1/A326.3 coefficient of friction and AS HB198:2014 slip tests.

### **ELECTRICAL COMPONENTS & SPECIFICATIONS**

Hydrotherapy Package	Components Included	GFCI / 110V
Standard Whirlpool	2-bhp pump	1-15 amp
Microbubbles	Microbubbles pump	1-15 amp
Air Massage	heated blower	1-15 amp
Air Massage Elite	heated blower, chromatherapy	1-15 amp

Electrical requirements may change with the addition of optional therapy components. See specific option details or installation information. CSA Certified C/US; B45.5/IAPMO ANSI Z124.1 and ANSI 112.19.7

Hydrotherapy Package	Components Included	GFCI / 110V		
Microbubbles with Air	Microbubbles pump, heated blower	1-20 amp		
Microbubbles with Air Elite	Microbubbles pump, heated blower, chromatherapy	2-15 amp		
Air with Whirlpool	2-bhp pump, heated blower	2-15 amp		
Air Elite with Whirlpool	2-bhp pump, heated blower, chromatherapy	2-15 amp		

See the Installation & Operation Manual for more details. MTI's Customer Service Monday-Friday 8am-6pm EST 800-783-8827 or service@mtibaths.com

- Before discarding tub crate, check for accessories that may be packaged inside.
  All product measurements are ±1/2".
  Specifications and configurations are subject to change without notice.
  Measurements herein supersede all others published prior to publication date below.



Mirage MODEL # 43 59.5" x 30.5" / 42" x 19.75"

- Aromatherapy is eliminated for undermount applications
- Air Baths, Pre-Leveled Foam Base or Frame Systems increase overall height by 2-3".

Hydrotherapy Packages	Package Contents	Part #	MSRP
Soaker	Soaking bath - no jets	S43	\$2,960
Microbubbles	1 microbubbles infusion port and pump	M43	\$6,280
Air Massage	20 air jets, heated air blower, Aromatherapy, pre-leveled foam base	AST43	\$6,610
Air Massage Elite	30 air jets, heated air blower, Aromatherapy, Chromatherapy LED lighting, Spa Mode, pre-leveled foam base	AE43	\$8,510
Microbubbles with Air Massage	1 microbubbles infusion port and pump, 20 air jets, heated air blower, Aromatherapy, pre-leveled foam base	ASTM43	\$9,330
Microbubbles with Air Massage Elite	1 microbubbles infusion port and pump, 30 air jets, heated air blower, Aromatherapy, Chromatherapy LED lighting, Spa Mode, pre-leveled foam base	AEM43	\$11,130
Standard Whirlpool	6 point-massage jets, 2-bhp pump	P43	\$5,815
Air Massage with Standard Whirlpool	6 point-massage jets, 2-bhp pump, 20 air jets, heated air blower, Aromatherapy, pre-leveled foam base	AW43	\$9,465
Air Massage Elite with Standard Whirlpool	6 point-massage jets, 2-bhp pump, 30 air jets, heated air blower, Aromatherapy, Chromatherapy LED lighting, Spa Mode, pre-leveled foam base	AEAP43	\$11,365

### RECOMMENDED SENSORY THERAPIES

Chromatherapy

(LE) \$800 underwater lighting 2 LED lights included

**Audiotherapy** 

(STEREOBT) **\$1,390** 2 transducers with bluetooth and amplifier (BTREMOTE) \$600 bluetooth remote (STEREOH202) \$1,575 4 transducers amplifier not included

Thermaltherapy (RAD100) **\$1,595** Radiance®

2 heated zones included (HTISOAK) **\$825** 



For more information on options and accessories go to Acrylic Tub Options on mtibaths.com

Mirage MODEL # 43

### Options

Standard Colors White (CWH) Biscuit (CBS)

Quick Ship reduces lead time (QSPRI) \$430

Please call for availability

Inline Heater maintains water temperature

For Soaker or Air Baths (HTISOAK) \$825

Includes a recirculating pump

Cannot be combined with Microbubbles.

Virtual Spout high-flow integrated tub filler (FPMJ) \$450

Must specify stub-out location on order. See page 1 for location options.

Grab Bars from \$330

Selections vary. Personalization available.

#### Accessories

Pillows from \$180

Teak Bath Mat (TKMAT3018) \$815

Custom sizes also available. Contact MTI for details and pricing.

### **Hydrotherapy Equipment & Cleaning Systems** Must be ordered at time of purchase.

Inline Heater maintains water temperature

For Whirlpools or Stream Bath (HTI) \$570

Uses existing pump

Cannot be combined with Microbubbles.

### Whirlpool Cleaning Systems

Fill-Flush (FFSO) \$590

Simple Touch (FFE) \$1,020

Must specify stub-out location on order. See page 1 for location options.

Whirlpool Jets Pump upgrade may be advisable for optimal performance when adding jets.

Point-Massage Jet

Extra Point-Massage Jet (EJ) \$315

Micro-Jet from \$360

Jet styles and packages vary. Personalization available

Pump Upgrade - 3-bhp (PUMP3) \$315

#### Jet Trim Kits

For Standard Whirlpool

Chrome (TRC) \$270, Brushed Nickel (TRBN) \$725

For Ultra Whirlpool

Chrome (TRCU) \$370, Brushed Nickel (TRBNU) \$960

Ozonator (OZONE) \$515

Cannot be added to soakers or airbaths without combination hydrotherapy package or HTISOAK.

# Installation Options Must be ordered at time of purchase.

Pre-Leveled Foam Base (PLFOAM) \$295

All airbaths include a pre-leveled foam base.

Pre-Leveled Frame and Foam Base (PLF) \$740

Pre-Leveled Frame and Foam Base with Skirting

Install Ease Package (FSKIE) \$1,135

### Tile Flange

Factory-Installed on 3 sides - rigid ABS (TFK3) \$200

Field Install Kit - includes rigid ABS & adhesive (TFKNI) \$185

IMPORTANT: Must specify flange location(s) on order of Factory-Installed Flange. Not available with optional Low-Profile Rim.

### **Drains & Overflow Kits**

### **Cable Driven**

Drain Finishes - PVC Drain Kit White/Biscuit (WOCDW) \$440

Chrome (WOCD) \$410

Brushed Nickel (WOCDBN) \$490

Polished Nickel (WOCDPN) \$540

Oil-Rubbed Bronze<sup>†</sup> (WOCDOR) \$550 Polished Brass (WOCDBR) \$690

Special Finishes\* (WOCDSF) \$1,135 MTI does not offer a brass body cable drain kit.

## Toe Tap

Round Overflow - PVC Drain Kit

Chrome (WOTTC) \$380

Brushed Nickel (WOTTBN) \$385

Polished Nickel (WOTTPN) \$385

Special Finishes\* (WOTTSF) \$1,145

Round Overflow - Solid Brass Drain Chrome (WOTTSBC) \$810

Brushed Nickel (WOTTSBBN) \$810

Polished Nickel (WOTTSBPN) \$810

## Toe Tap Rectangular Overflow must be ordered at time of purchase Toe Tap

Rectangular Overflow - PVC Drain Kit

Chrome (WOTRC) \$470

Brushed Nickel (WOTRBN) \$430

White (WOTRW) \$525

Lift & Turn

Drain Finishes - PVC Drain Kit

Chrome (WOC) \$185

White (WOW) **\$245** 

Brushed Nickel (WOBN) \$305

### Slim-Line Overflow with Toe Tap Drain Must be ordered at time of purchase.

- Low profile overflow is factory installed
- Overflow measures 4.5" x 1" Provides a deeper soak
- Not available for commercial applications

### Slim-Line Overflow with Toe Tap Drain

PVC Drain

Chrome (SLOTC) \$500

Brushed Nickel (SLOTBN) \$530

Polished Nickel (SLOTPN) \$555

White (SLOTW) \$430

### Slim-Line Overflow with Toe Tap Drain

Solid Brass Drain

Chrome (SLOTSBC) \$930

Brushed Nickel (SLOTSBBN) \$935

Polished Nickel (SLOTSBPN) \$935

White (SLOTSBW) \$965



Shown with Install Ease Package

NOTE: When tub is ordered with Install Ease Package, wall-mount valves are required. A faucet cannot be mounted on front deck of tub.

Allow 2-4 weeks lead time for Special Finishes. Send sample for best match



<sup>&</sup>lt;sup>†</sup> MTI has selected an oil-rubbed bronze finish that is compatible with Delta and many other manufacturers. e best match, order as a Special Finish and submit a sample