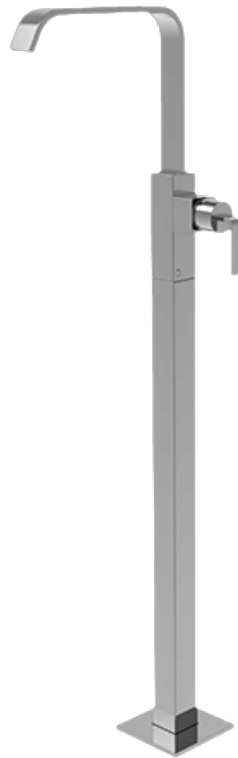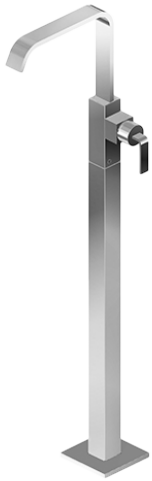BATHROOM
Immersion Floor-Mounted Vessel Filler
G-2325-LM40N

GRAFF®
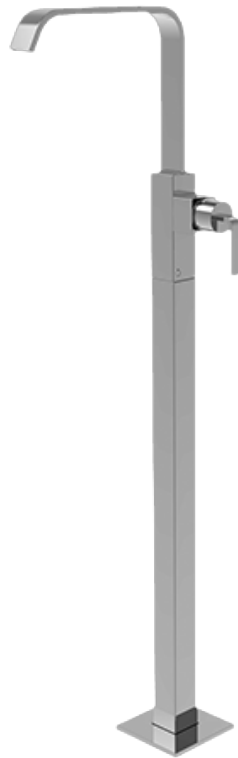
Information

- Floor-mount installation
- Aerated flow rate ≤ 1.2 max gpm
- 9-13/16" spout reach
- 39-3/8"-41-5/8" maximum spout height
- Drain assembly not included
- ADA
- CALGreen

G-2325-LM40N
Immersion Collection
Floor Mounted Vessel Filler

GRAFF®
CUTTING EDGE DESIGN
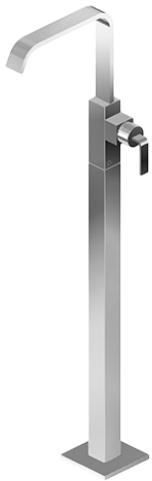
Product Features

- Floor-mount installation
- Aerated flow rate ≤ 1.2 max gpm
- 9-13/16" spout reach
- 39-3/8"-41-5/8" maximum spout height

Available Finishes

- Polished Chrome
  G-2325-LM40N-PC
- Steelnox
  G-2325-LM40N-SN

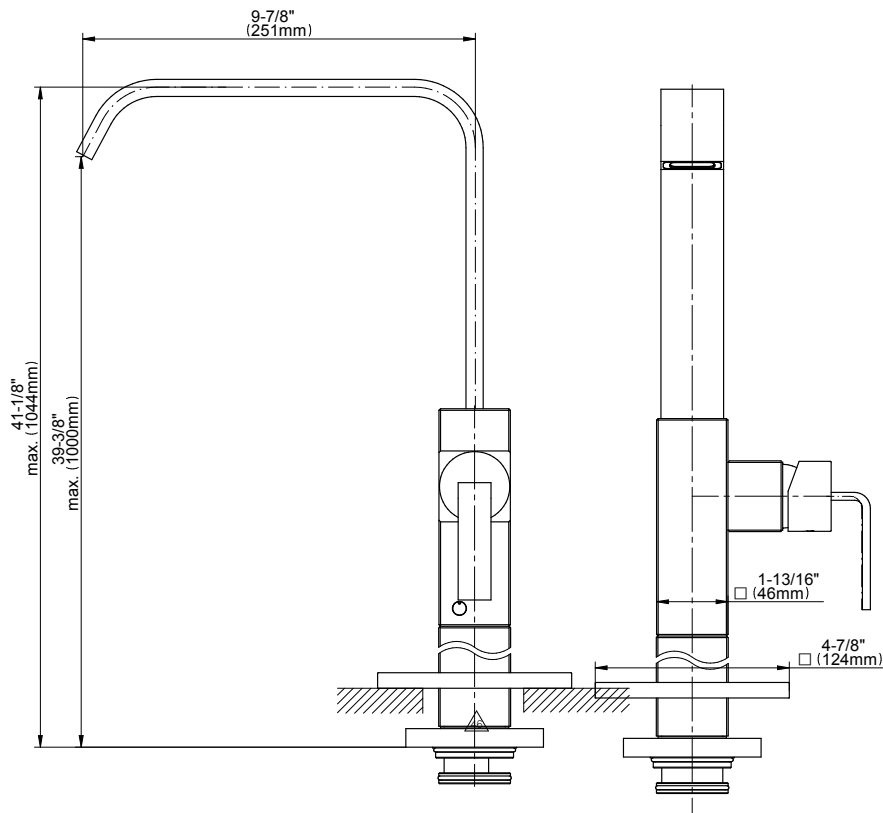 * Special order finish- call for availability

Code Compliance

- *CALGreen*
- ADA

Warranty

- Limited lifetime warranty

For complete warranty information go to
www.graff-designs.com/en-nam/warranty

9-7/8"
(251mm)

41-1/8"
max. (1044mm)

39-3/8"
max. (1000mm)

1-13/16"
□ (46mm)

4-7/8"
□ (124mm)

GRAFF®

FLOOR MAX.

FLOOR MIN.

Finishes

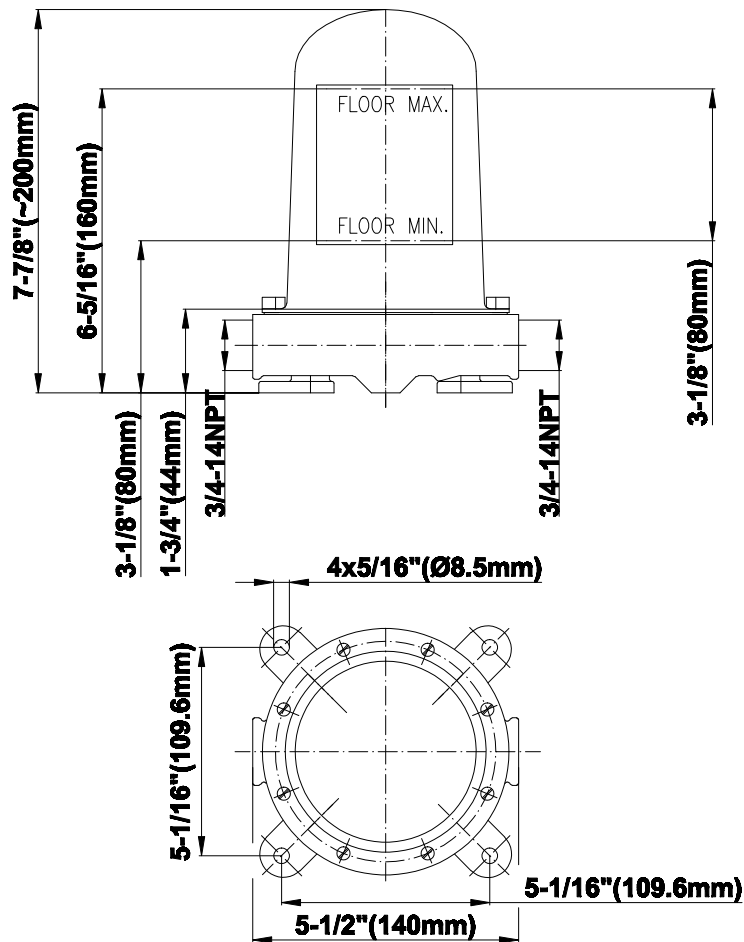| 24K Gold | 24K Brushed Gold | Architectural Black™ | Matte Black | Polished Chrome | Polished Nickel | Steelnox® (Satin Nickel) | Architectural White |

FLOOR MAX.

FLOOR MIN.

Product Features

- Mud guard displays minimum and maximum floor depth
- Rough can be installed in any orientation making it convenient to route pipes to the rough
- Trim can be rotated 360 degrees in any directions
- Averages 10 GPM with most trim

Warranty

- Limited lifetime warranty

For complete warranty information go to http://www.graff-faucets.com/en/info/faqs

FLOOR MAX.

FLOOR MIN.

7-7/8"(~200mm)

6-5/16"(160mm)

3-1/8"(80mm)

3-1/8"(80mm)

1-3/4"(44mm)

3/4-14NPT

3/4-14NPT

4x5/16"(Ø8.5mm)

5-1/16"(109.6mm)

5-1/16"(109.6mm)

5-1/2"(140mm)

The measurements shown are for reference only. Products and specifications shown are subject to change without notice. Revised 07/2017.

www.graff-faucets.com | phone: 800-954-4723

Information

- Floor-mount installation
- Aerated flow rate ≤ 1.2 max gpm
- 9-13/16" spout reach
- 39-3/8"-41-5/8" maximum spout height
- Drain assembly not included
- ADA
- CALGreen

Finishes

| 24K Gold | 24K Brushed Gold | Architectural Black™ | Matte Black | Polished Chrome | Polished Nickel | Steelnox® (Satin Nickel) | Architectural White |

Product Features

- Floor-mount installation
- Aerated flow rate ≤ 1.2 max gpm
- 9-13/16" spout reach
- 39-3/8"-41-5/8" maximum spout height

Available Finishes

- Polished Chrome
  G-2325-LM40N-PC
- Steelnox
  G-2325-LM40N-SN
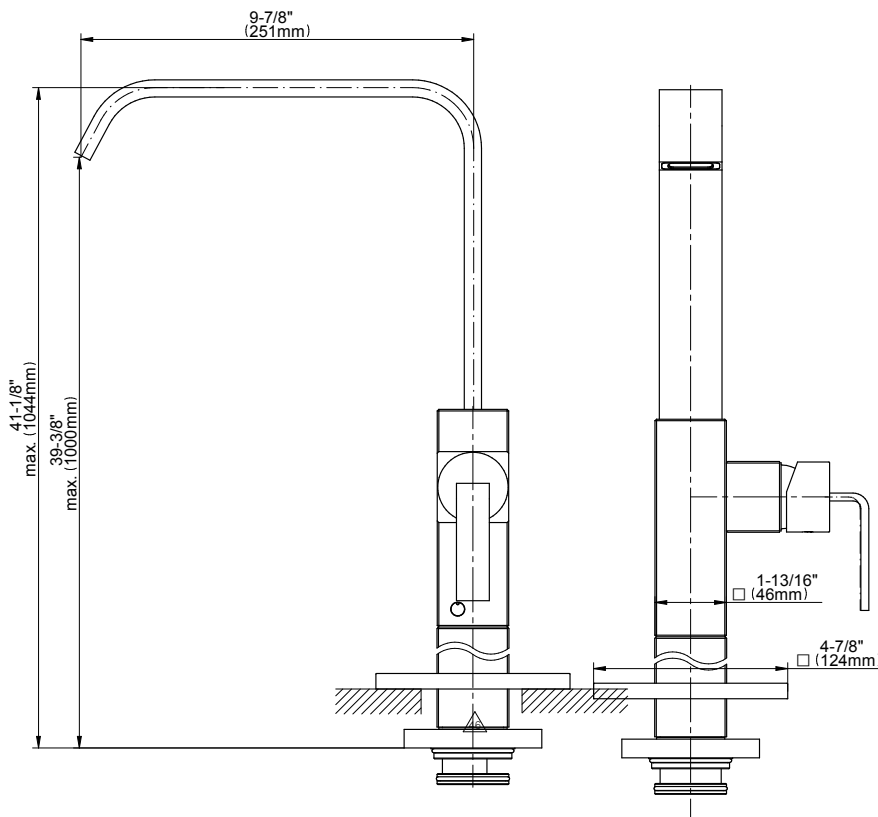
  * Special order finish- call for availability

Code Compliance

- *CALGreen*
- ADA

Warranty

- Limited lifetime warranty

For complete warranty information go to
www.graff-designs.com/en-nam/warranty

9-7/8"
(251mm)

41-1/8"
max. (1044mm)

39-3/8"
max. (1000mm)

1-13/16"
☐ (46mm)

4-7/8"
☐ (124mm)