



FEATURES

- Solid brass construction for durability and reliability
- Single lever handle allows for both ON/OFF activation and temperature setting
- Floor-mount installation
- 9-1/2" (241 mm) spout reach
- 9 gal/min (34 l/min) flow rate
- Integral valve
- Includes hardware kit and escutcheon
- Complements the Script collection

CODES/STANDARDS APPLICABLE

- Specified model meets or exceeds the following:
- ASME A112.18.1/CSA B125.1
 - ASSE 1014

P25088

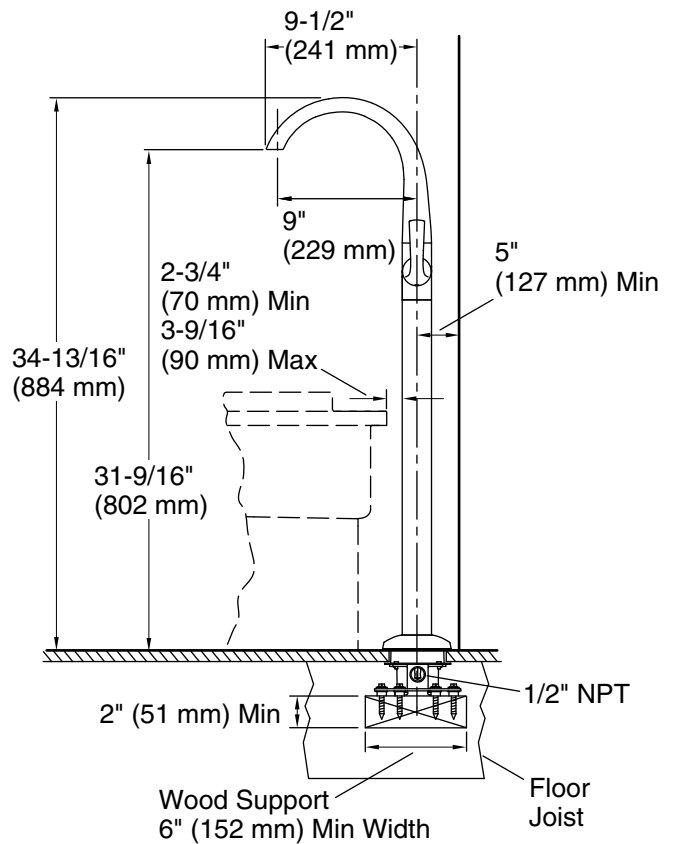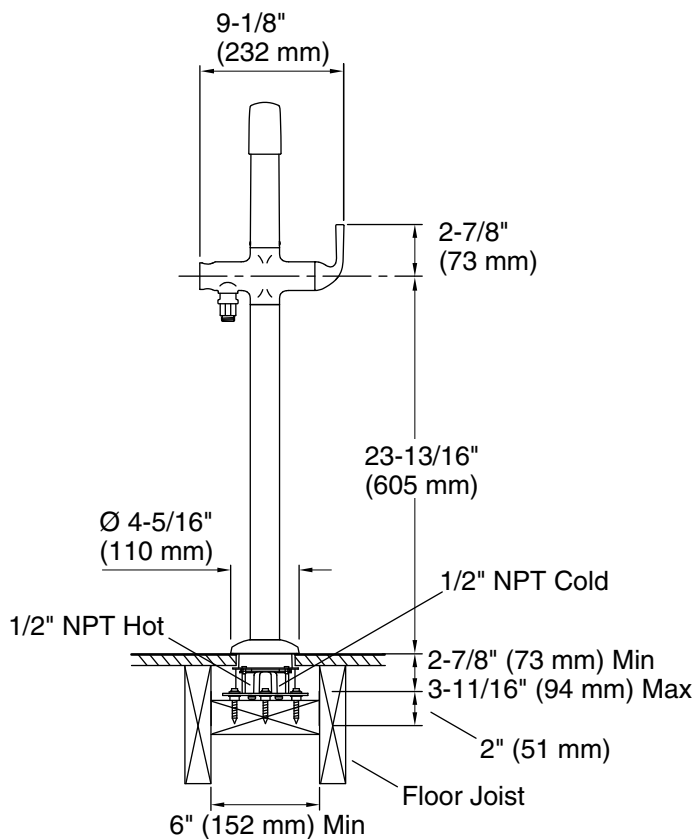

SPECIFIED MODEL

Model	Description	Finishes		
P25088-00	Script Floor-Mount Bath Filler	<input type="checkbox"/> CP Polished Chrome	<input type="checkbox"/> AD Nickel Silver	<input type="checkbox"/> BCH Blush Bronze
Required Accessories				
P24761-00	Soft Modern Dual-Function Handshower w/Hose	<input type="checkbox"/> CP Polished Chrome	<input type="checkbox"/> AD Nickel Silver	<input type="checkbox"/> AG Brushed Nickel
		<input type="checkbox"/> W7 Black Nickel	<input type="checkbox"/> GN Gunmetal	<input type="checkbox"/> BCH Blush Bronze
P20512-00	Dual Mounting Block	<input type="checkbox"/> NA		

We reserve the right to make revisions without notice in the design of products or in packaging unless this right has specifically been waived at the time the order is accepted.