

Artifacts® Deck-Mount Bridge Secondary Sink Faucet K-76520-4

Features

- Matching two-function sidespray featuring Sweep[®] Spray and BerrySoft[®] provides convenience for cleaning and food prep.
- Sweep[®] spray creates a wide, forceful blade of water for superior cleaning.
- BerrySoft[®] is a light spray that gently washes fruits and vegetables.
- Ceramic disc valves exceed industry longevity standards, ensuring durable performance for life.
- ProMotion[®] technology's light, quiet braided hose and swiveling ball joint make the sidespray easier and more comfortable to use.
- MasterClean[™] sprayface features an easy-to-clean surface that withstands mineral buildup.
- Swing spout offers increased clearance for filling pots and cleaning.
- Two lever handles offer separate control of hot and cold water.
- 1.5 gal/min (5.7 l/min) maximum flow rate [max at 60 psi (4.14 bar)]

Material

- Premium metal construction.
- KOHLER finishes resist corrosion and tarnishing.
- Sidespray is color-matched to the faucet finish.

Installation

• Three-hole or four-hole installation.

Recommended Products/Accessories

K-77685 Single-Cartridge Water Filtration System K-77686 Double-Cartridge Water Filtration System K-77687 single replacement filter cartridge K-77688 Replacement Filter Cartridges, Two-Pack



ADA CSA B651

Codes/Standards ASME A112.18.1/CSA B125.1 NSF/ANSI 61 NSF/ANSI 372 All applicable US Federal and State material regulations DOE - Energy Policy Act 1992 California Energy Commission (CEC) ADA ICC/ANSI A117.1 CSA B651

KOHLER[®] Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color Code Description


CP	Polished Chrome
SN	Vibrant® Polished Nickel
VS	Vibrant® Stainless
2BZ	Oil-Rubbed Bronze



Artifacts®

KOHLER, Faucets

Deck-Mount Bridge Secondary Sink Faucet K-76520-4

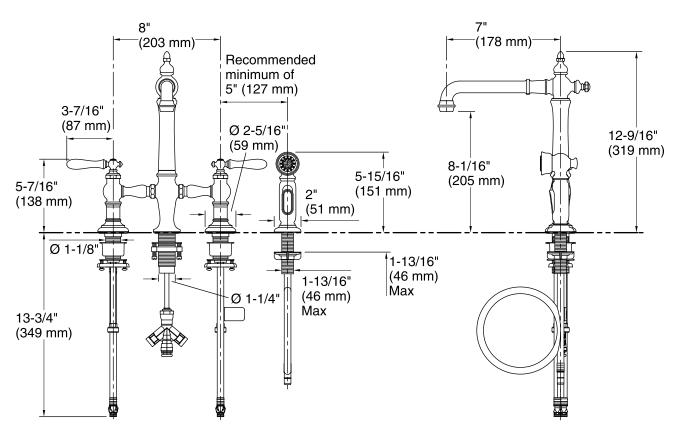

Technical Information

All product dimensions are nominal.

Faucet:

Flow rate: Pressure:

Sidespray:

Flow rate: Pressure:

Spout:

Spout reach: Handle clearance: 1.5 gal/min (5.7 l/min) 60 psi (4.1 bar)

1.8 gal/min (6.8 l/min) 60 psi (4.1 bar)

7" (178 mm)

3-7/16" (88 mm)

Notes

Install this product according to the installation quide. Drill the hole for the sidespray a minimum of 5"

(127 mm) from the center of the lever handle. ADA, CSA B651 compliant when installed to the specific requirements of these regulations.

1-800-4KOHLER (1-800-456-4537) Kohler Co. reserves the right to make revisions without notice to product specifications. For the most current Specification Sheet, go to www.kohler.com. 4-26-2019 01:38 - US/CA

