

Artifacts® floor-mount bath filler trim with handshower K-T72790-9M

Features

- Single lever handle allows for both on/off activation and temperature setting.
- KOHLER ceramic disc valves exceed industry longevity standards for a lifetime of durable performance.
- Includes Artifacts[®] single-function handshower and a 60-inch hose.
- 8 gpm maximum flow rate (30 l/min) @ 45 psi.
- 1.75 gpm (gallons per minute) flow rate for handshower.
- Coordinates with Artifacts[®] faucets, accessories and showering components to complete your bathroom.
- Requires K-97339 mounting-block.

Material

- Premium metal construction.
- KOHLER finishes resist corrosion and tarnishing.

Installation

- Floor-mount.
- Compatibility with tub varies by application.

Required Products/Accessories

K-97339 Multiproduct Mounting-block

Components

Additional included component/s: 72776.





Codes/Standards

ASME A112.18.1/CSA B125.1 DOE - Energy Policy Act 1992 EPA WaterSense[®] California Energy Commission (CEC)

KOHLER[®] Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color Code Description


CP Polished Chrome



Artifacts®

KOHLER, Faucets

floor-mount bath filler trim with handshower K-T72790-9M

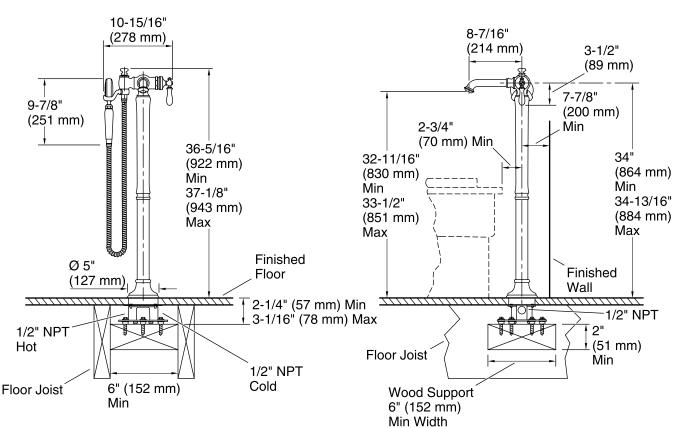

Technical Information

All product dimensions are nominal.

Faucet:

Flow rate:	8 gal/min (30.3 l/min)
Pressure:	45 psi (3.1 bar)
Valve body:	Composite
Drain included:	No

Spout:

Spout reach: 8-7/16" (214 mm) 3-1/2" (89 mm) Handle clearance:

Handshower:

Rated maximum flow: 1.75 gal/min (6.6 l/min) Pressure:

80 psi (5.5 bar)

Notes

Install this product according to the installation instructions.

Adequate floor support is required. The wood support must be a minimum of 2" (51 mm) thick by 6" (152 mm) wide. 2x6 lumber is NOT adequate for this application.

Concrete can be used as the floor support. Requires 3/16" masonry drill bit and six 1/4" x 1-3/4" concrete screws, not included.

